

REACH-IN FREEZERS

MODEL: MXCF-19FDHC MXCF-23FDHC MXCF-49FDHC MXCF-72FDHC



MXCF-19FDHC



MXCF-23FDHC



MXCF-49FDHC



MXCF-72FDHC


Maxx Cold Reach-In Freezers store frequently accessed foodservice products within reach and at the proper storage temperature. The Reach-in Freezers are constructed of durable stainless steel, and include self-closing doors and an oversized refrigeration system to meet the needs of demanding applications.

FEATURES AND CONSTRUCTION

- Constructed of a durable, easy to clean stainless steel exterior and painted aluminum interior
- Self-closing, locking doors with easy to grip recessed handles
- Adjustable heavy-duty wire shelves (3 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters
- Digital control system
- LED temperature display
- Automatic defrost system
- Automatic interior lighting
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors

ELECTRIC

Single & Double Door: 115V / 60Hz / 1Ph
 Triple Door: 230V / 50-60Hz / 1Ph
 6' (2m) cord set included



NEMA 5-15P



NEMA L14-20R

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Meets Energy Star Guidelines
 MXCR-23FDHC / MXCR-49FDHC



Zero Ozone
 Depletion Potential



DOE 2018 Compliant

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797

NOMINAL STORAGE CAPACITY


MXCF-19FDHC.....	19 Cu Ft (538 L)
MXCF-23FDHC.....	23 Cu Ft (651 L)
MXCF-49FDHC.....	49 Cu Ft (1387 L)
MXCF-72FDHC.....	72 Cu Ft (2039 L)

TEMPERATURE

Holding temperature -10°F to 10°F (-23°C to -12°C)

- Efficient forced-air refrigeration system

MAXX COLD *X-series* REACH-IN FREEZERS

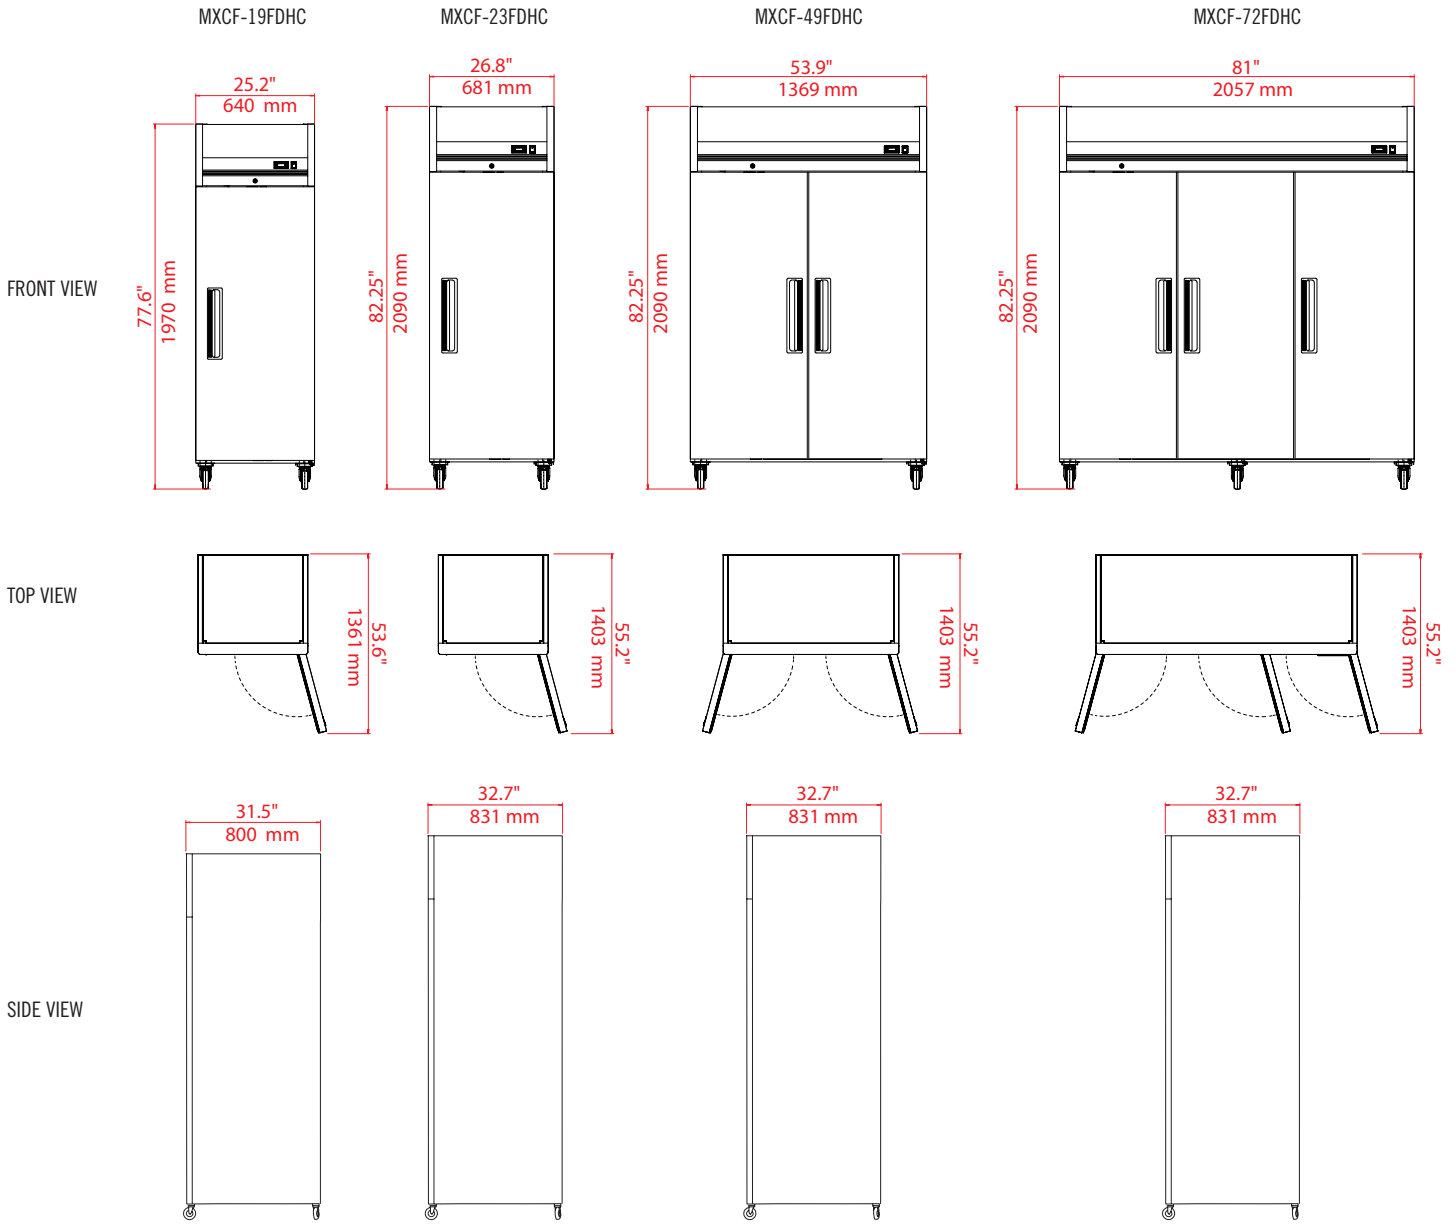

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MXCF-19FDHC	25.2" x 31.5" x 77.6" (640 x 800 x 1970 mm)	20.25" x 28.7" x 61.8" (514 x 730 x 1570 mm)	19 Cu Ft (538 L)	-10°F to 10°F (-23°C to -12°C)	8A	296 lbs (134 kg)	R-290A 3.88 oz (110 g)	1 / 3	115V / 60Hz / 1Ph
MXCF-23FDHC	26.8" x 32.7" x 82.25" (681 x 831 x 2090 mm)	21.9" x 26.5" x 52.1" (556 x 673 x 1324 mm)	23 Cu Ft (651 L)	-10°F to 10°F (-23°C to -12°C)	8A	336 lbs (140 kg)	R-290A 3.88 oz (110 g)	1 / 3	115V / 60Hz / 1Ph
MXCF-49FDHC	53.9" x 32.7" x 82.25" (1369 x 831 x 2090 mm)	49.1" x 26.5" x 52.1" (1246 x 673 x 1324 mm)	49 Cu Ft (1387 L)	-10°F to 10°F (-23°C to -12°C)	9A	502 lbs (228 kg)	R-290A 5.29oz (150 g)	2 / 6	115V / 60Hz / 1Ph
MXCF-72FDHC	81" x 32.7" x 82.25" (2057 x 831 x 2090 mm)	76.1" x 26.5" x 52.1" (1933 x 673 x 1324 mm)	72 Cu Ft (2039 L)	-10°F to 10°F (-23°C to -12°C)	9A	601 lbs (272 kg)	R-290A 5.29oz (150 g)	3 / 9	230V / 60Hz / 1Ph

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit